

# 3.96mm(.156")Wire To Wire And Wire To Board Connector







Shenzhen Hongru Connector Co., Ltd

Email: yukyli@hrb-connector.com  
 Tel: 86-0755- 2709 6669  
 Fax: 86-0755-2709 2392  
 Skype: haiyuncheng-vivian  
 Mobile(Whatsapp): 86-186 8112 3590  
 Website: <http://www.hrb-connector.com>

## SPECIFICATIONS:

- Current Rating:7A AC,DC
- Voltage Rating:600V AC,DC
- Operating Temperature:-25℃~+85℃
- Contact Resistance:3.0mΩ max.
- Insulation Resistance:5000MΩ Min.
- Withstanding Voltage:2200V AC/minute
- Material:Housing:Nylon66 UL94V-2

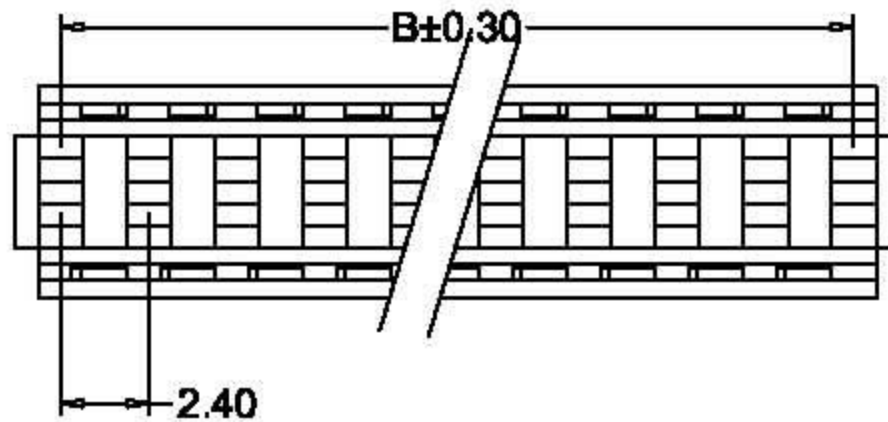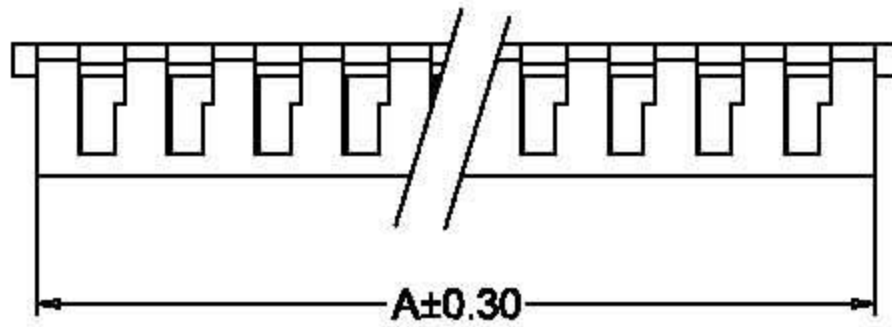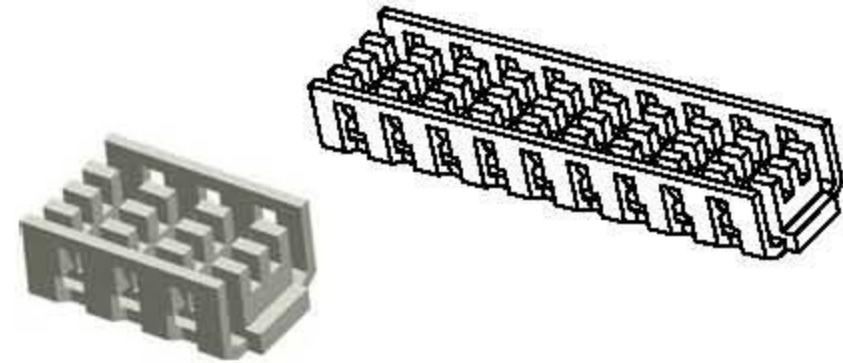

## Ordering Information And Dimensions

Part NO.		Dimensions		Part NO.		Dimensions		Part NO.		Dimensions	
TYP UL94V-2	Circuits	Dim:A	Dim:B	TYP UL94V-2	Circuits	Dim:A	Dim:B	TYP UL94V-2	Circuits	Dim:A	Dim:B
M7061(I)-2	2	5.83	3.96	M7061(I)-9	9	33.55	31.68	M7061(I)-16	16	61.27	59.40
M7061(I)-3	3	9.79	7.92	M7061(I)-10	10	37.51	35.64	M7061(I)-17	17	65.23	63.36
M7061(I)-4	4	13.75	11.88	M7061(I)-11	11	41.47	39.60	M7061(I)-18	18	69.19	67.32
M7061(I)-5	5	17.71	15.84	M7061(I)-12	12	45.43	43.56	M7061(I)-19	19	73.15	71.28
M7061(I)-6	6	21.67	19.80	M7061(I)-13	13	49.39	47.52	M7061(I)-20	20	77.11	75.24
M7061(I)-7	7	25.63	23.76	M7061(I)-14	14	53.35	51.48				
M7061(I)-8	8	29.59	27.72	M7061(I)-15	15	57.31	55.44				

